









CAPTAIN AGRI MACHINERY EXIM LLP Exports Arm of Captain tractors PVT. Ltd.

Veraval (Shapar), District : Rajkot (Gujarat) INDIA. Pincode - 360024.

Ph./Landline : + 91 281 299 4386, Mo : +91 99250 40445, Email : exports@captaintractors.com

# CAPTAIN

TRACTORS AND AGRICULTURAL MACHINERY

THE ROAR GETS LOUDER
FROM THE LAND OF LIONS

Compliance



# RELIABILITY

Reliability that Stand Strong through every Challenge

Manufactured using a 3 - cylinder Mitsubishi diesel engine. Mitsubishi engines are well known for their reliability, power and ability to generate outstanding horsepower along with EPA Tier 4 compliance.





Leading Every SEASON 99

## **COMFORT**

Sit with King's Comfort

Captain compact HST tractor series is unmatched in comfort with a full flat footboard, ergonomic sitting area and full featured COMFORTABLE SEAT.



Lift the lever to adjust the seat forward or backward.

Adjust the seat back rest by pulling the lever.





Adjust the seat bottom by pulling the lever.

Adjust the knob to achieve the desired suspension settings.





Adjust the seat height vertically by turning the knob.

Adjust ARM REST Setting by using the knob.



Innovative Feature

**COMFY Seat with Air Ride** 

# TIRE OPTIONS TO SUIT DIFFERENT Needs 1 AGRICULTURE TIRE 2 TURF TIRE

Rear Tire - 8.3x20

**Different** 





Front Tire - 180/85D12









www.captainagri.com www.captainagri.com

#### **Italian Designed**

#### LION FACELIFT

From the land of Asiatic lions.


CAPTAIN 8G "LION FACE" Designed by Italian Company.



Lion Face Front Design




**Bold & Muscular Outlines** (Steel Hood / Bonnet & Fender)

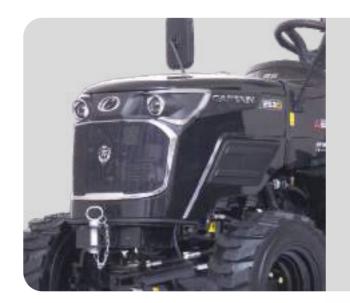



#### **Powerful HYDRAULICS**

Powerful lifting capacity of 1488 lbs.(at lower link point) No loss of hydraulic oil flow while using steering.







#### MITSUBISHI







Powerful

25 Ps, 3 cylinders, 80.42 Ci with low fuel consumption & reduced engine noise. 2500 rated speed (RPM), liquid cooled engine system.







Low Fuel Consumption





#### More Versatile

#### FRONT ATTACHMENTS

Captain loader specifically designed to maximize the performance of the front loader and tractor. They offer a large lifting capacity, perfect for landscaping or light utility work.







#### Powerful - 3 Range **TRANSMISSION**

Reliable HST Transmission.

HST offers fast and smooth forward and reverse speed and direction changes via twin HST foot pedals.







Oil Immersed Brakes



Twin HST Pedals for







# LET'S DIVE IN THE FUTURISTIC WORLD OF CAPTAIN

Captain Tractors performs well in toughest working conditions and gives desired output in all kinds of farming functions.

MODEL SE

Eazy to Operate





#### **Enhanced Features**



Skid Steer Quick Attach Type

3rd Function Valve



Flow Control Valve on DCV to Control Dropping Rate of Loader Boom



Single Joystick with
Positive Locking System



Unique Additional Rectangular Support Crossbars all Across the Loader

#### Also Available Different Types of Bucket



Standard / Heavy Duty Bucket



Grapple Fork Bucket



4 in 1 Bucket



Pallet Fork

Some accessories like Beacon lamp, Fender Extension, Counter Weights, Auxiliary Hydraulics, etc. are optional.

#### CAPTAIN 2532



#### **Tractor with Hydrostatic Transmission**



TIRE OPTIONS















			(I LOTATION)	WIDL I LUS	ш
Front	180/85D12	23 x 8.5 - 12	23 x 8.5 - 12	180/85D12	
Rear	8.30 x 20	33 x 15.5 - 16.5	33 x 15.5 - 16.5	280/70R20	

5 - 12	180/85D12	240/60R12	23 x 8.5 - 12	23 x 8.5 - 12
- 16.5	280/70R20	320/65R18	280/70R18	12 x 16.5

ENGINE	EPA Tier 4 Compliant
Engine Horse Power Ps (kW)	25 (18.4)
Engine : Type	Mitsubishi - 4 Cycle Water Cooled
No. of Cylinder	3
Capacity, Ci (Cc)	80.42 (1318)
Rated Speed (RPM)	2500
Cooling System	Liquid Cooled
Bore / Stroke, Inch (mm)	3.07/3.62 (78/92)
Max Torque (Nm) @ RPM	76.3 (Nm) @ 2000 RPM

TRANSMISSION	
Туре	Hydrostatic - 3 Range
Gears / Range	3 Forward / Reverse, Options : Low, Medium or High Gear
PTO RPM	Rear 540 @2406 ERPM / Mid 2000 @2430 EPRM
Steering	Hydrostatic Power Steering
Brake Type	Multi Disc Oil Immersed

HYDRAULIC	
Hydraulic System	Precision Control
Lift Capacity, lbs (Kgs.)	1488 (675) at Lower Link Point / 1235 (560) at 24 Inches from Lower Link Holes
No. of Pumps : Flow, GPM (LPM)	2 (One for Hydrostatic Transmission Unit & Steering, other for Hydraulic System): 7.40 (28)
Auxiliary Hydraulics	Optional Kit Available : 1 DA Auxiliary Hydraulics with 2 QRCs or 2 DA Auxiliary Hydraulics with 4 QRCs

SPEED & DIMENSIONS#							
Speed, miles/hr. (Km/hr.)	0 to 13.67	0 to 12.79	0 to 13.24	0 to 13.86	0 to 13.28	0 to 13.04	0 to 13.17
	(0 to 22.00)	(0 to 20.58)	(0 to 21.30)	(0 to 22.30)	(0 to 21.37)	(0 to 21.00)	(0 to 21.20)
Length, Inch (mm)	109.84 (2790)	109.84 (2790)	109.84 (2790)	109.84 (2790)	109.84 (2790)	109.84 (2790)	109.84 (2790)
Width, Inch (mm)	44.88 (1140)	58.66 (1490)	58.66 (1490)	46.02 (1169)	50.79 (1290)	48.03 (1220)	49.29 (1252)
Height, Inch (mm)	95.28 (2420)	93.70 (2380)	93.90 (2385)	94.96 (2412)	94.41 (2398)	94.13(2391)	94.17 (2392)
Wheel Base, Inch (mm)	61.02 (1550)	61.02(1550)	61.02(1550)	61.02(1550)	61.02(1550)	61.02(1550)	61.02(1550)
Rear Track Center, Inch (mm)	31.93 to 39.05	40.50 (4000)	40.50 (4000)	04.00 (007)	04.00 (007)	33.27 to 38.90	07.17 (0.44)
	(811 to 992)	42.52 (1080)	42.52 (1080)	34.92 (887)	34.92 (887)	(845 to 988)	37.17 (944)
Weight, lbs (kgs.)	2337 (1060)	2432 (1103)	2491 (1130)	2407 (1092)	2403 (1090)	2350 (1066)	2443 (1108)


#+/- 5% Tolerance variations

Note: Products undergo continuous upgradations. Hence, above mentioned specifications are subject to change without prior notice.

#### **LOADER**

#### **Versatile Tools for Versatile Needs**

CAPTAIN LOADER specifically designed to maximize the performance of the front loader and tractor. They offer a high lifting capacity, perfect for landscaping or light utility work. The Captain Loader operates with single joystick control and has quick & easy attachment and detachment of bucket.



NO.	SPECIFICATIONS	LOADER : L2-4HS Non Self Levelling	LOADER : L2-5HS MECHANICALLY SELF LEVELLING
A	Pivot pin height at maximum, Inch(mm)	92 (2334)	92 (2334)
В	Height bucket parallel to ground at maximum, Inch(mm)	81 (2068)	81 (2068)
C	Bucket fully tilted bottom height, Inch(mm)	67 (1705)	67 (1705)
D	Bucket reach when fully dumped, Inch(mm)	Bonnet 14 (361) , Hook 10 (266)	Bonnet 13 (325) , Hook 9 (230)
E	Bucket tilt (dump) angle	50°	52.5°
F	Bucket forward position from front wheel center, Inch(mm)	60 (1534)	60 (1534)
G	Bucket roll back angle at ground level	38°	42°
Н	Bucket (parallel) height below ground level (digging depth), Inch(mm)	5 (116)	5 (116)
	Bucket fully tilted top height, Inch(mm)	117 (2970)	101 (2568)
J	Loader frame front top to ground level, Inch(mm)	37 (939)	39 (982)
WB	Wheel base, Inch(mm)	61 (1550)	61 (1550)
	Grill guard	Standard	Standard
	Lift capacity (pivot pin, max. height), lbs(kgs.)	1102 (500)	1102 (500)
	Bucket width, Inch(mm)	49 (1250)	60 (1522)
	Loader weight without attachment, lbs(kgs.)	683 (310)	683 (310)
	Standard bucket weight, lbs(kgs.)	161 (73)	181 (82)

Note : Products undergo continuous upgradations. Hence, above mentioned specifications are subject to change without prior notice.

Dimensions are with 8.3 x 20 tire,



#### **MID MOUNT MOWER**

#### Precision & Efficiency at your Fingertips

The applications of the **CAPTAIN MID MOUNT MOWER** demonstrate a wide range of uses across various sectors. The residential sector leads the market, fueled by a growing trend among homeowners to utilize compact tractors for the upkeep of their lawns and gardens.

Maximize your lawn care with the Captain mid mount mower's aesthetic design.

#### **RIDE ON AVAILABLE**



SPECIFICATIONS	MM60
Overall length, Inch (mm)	39 (1000)
Overall width, Inch (mm)	62 (1580)
Overall height, Inch (mm)	8 (210)
Cutting Width, Inch (mm)	60 (1530)
No. of Blades	3
Belt	V - Belt
Discharge	Side Discharge
Lift linkage type	Hydraulic Lift
Weight, lbs(kgs.)	324 (147)

Note: Products undergo continuous upgradations.

Hence, above mentioned specifications are subject to change without prior notice.

#### **BOX BLADE**

#### Conquer the Ground Effortlessly

The box blade is a versatile tractor attachment for grading, leveling, and clearing soil. Ideal for landscaping and road maintenance, it offers precision and durability for various earth-moving tasks.





#### **GRADER BLADE**

#### **Unleash Grading Power**

The grader blade is a tractor attachment for levelling surfaces, providing precision for road maintenance and landscape grading with a single blade.



#### LAND SCAPE RAKE

Rake it Like a Pro!

The landscape rake is a tractor attachment used for smoothing and leveling soil, removing debris, and preparing surfaces for planting.





#### **ROTAVATOR**

Dominate the Dirt Like a Champion!

The rotavator "prepares the ground effortlessly," breaking up compacted soil and integrating compost for healthier gardens and improved harvests.

### **QUICK HITCH**

Farm Smarter & Faster


A "Quick Hitch" revolutionizes farming by enabling fast, effortless attachment and detachment of tractor implements, boosting productivity.







# SHINING LIKE A STAR CAPTAIN

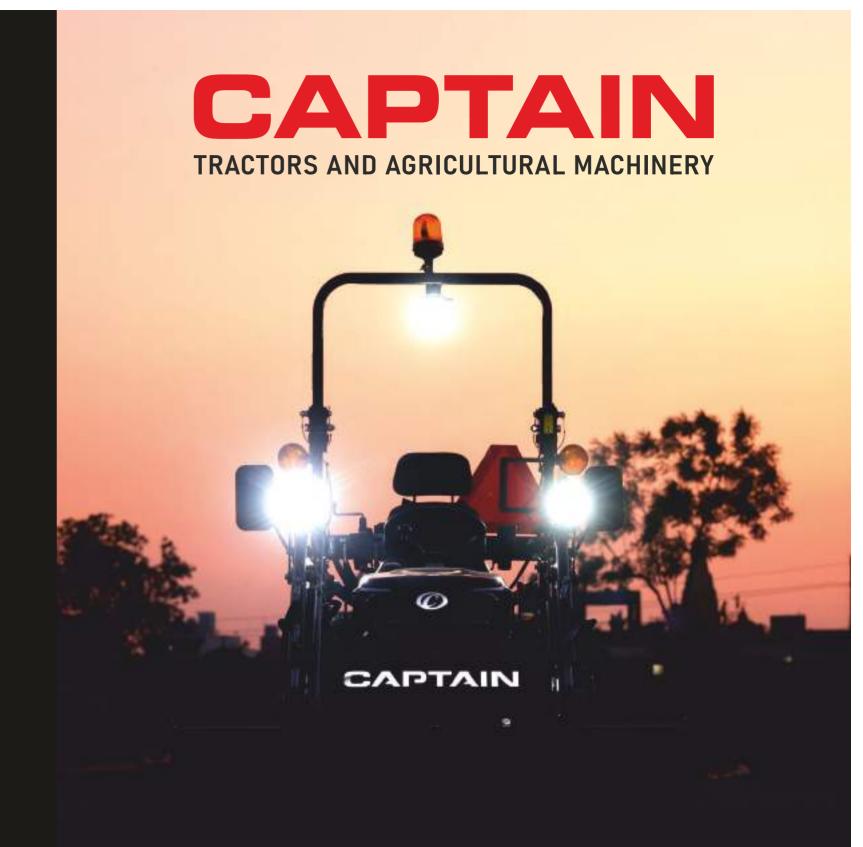

**CAPTAIN OF YOUR FARM** 



